


## RFID Transponder AC-001

### Datasheet

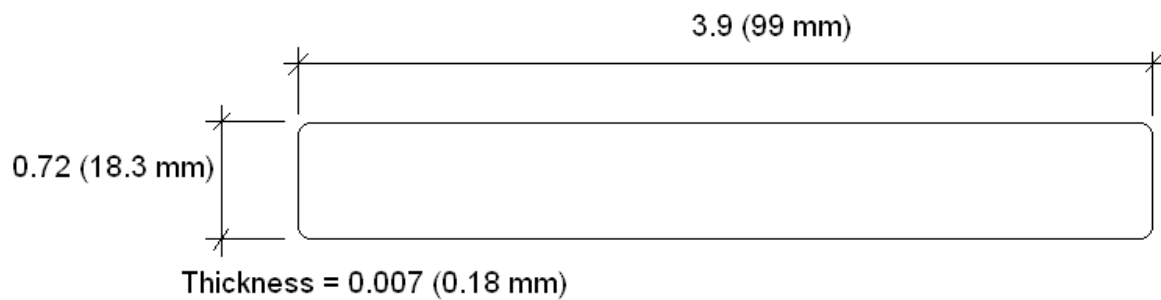

- Pressure sensitive UHF transponder optimized for polyethylene, polypropylene and other plastics
- For outdoor and indoor usage
- Operating temperature : -40°C to +70°C
- Application temperature : > +10°C
- Meets EPC global Class 1 Gen 2 and ISO/IEC 18000-6C standards
- Made from Alien® ALN-960 Squiggle® inlay
- Unique and unalterable 64 bits serial number factory programmed
- 512 bits of user memory (read and write)
- 96 bits of EPC memory